




**W. Schmid AG**

LED-Technology  
the visible difference

## Surface mounted LED spot ABS76



ABS76, 24 VDC

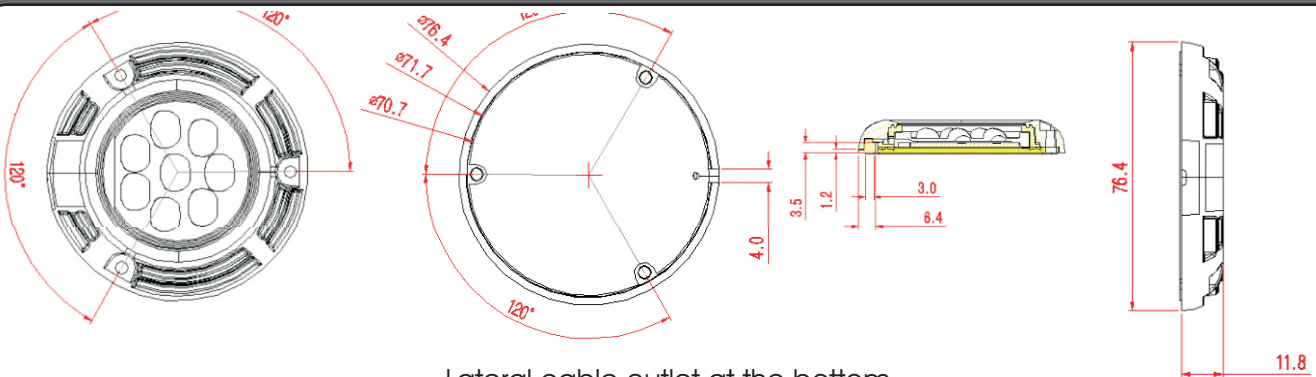

Lateral cable outlet at the bottom  
3 mounting holes Ø 5mm,  
distance: 30-34mm

### Specifications:

Description:	Flat surface mounted LED spot ABS76, 76mm
Dimensions:	Ø 76.5mm, H=12.3mm
Supply voltage:	24 VDC, other voltages upon request
Power consumption:	15W/350-650 mA
Viewing angles:	20/30/115/130/160°
Degree of protection:	IP 67
Class of protection:	III
Operating temperature:	-40 up to +50°C
Material:	Black anodized aluminium, PC lens
Weight:	0.09kg
Connection:	Cable, teflon 0.3m
Available ill. colour:	white 6500K
Applications:	Ceiling light, machine light, working place light, wall lamp, floor lamp, alarm indicator etc.