




**W. Schmid AG**

LED-Technology  
the visible difference

## LED - downlight EBL85C



EBL85C, 12/24VDC

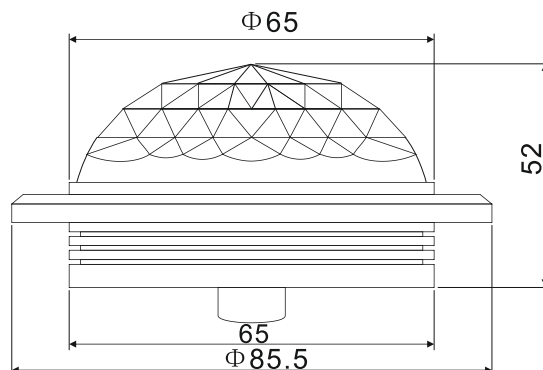

### Properties:

Description:	EBL85, panel mounted light Ø 85mm, convex
Dimensions:	Ø=85.5mm, h=52mm
Supply voltage:	12/24 VDC
Power consumption:	3W
Viewing angle:	110°
Degree of protection:	IP 65
Class of protection:	III
Operating temperature:	-25 bis +50°C
Material:	colorless anodized aluminum, transparent lens
Weight:	0.2kg
Connection:	cable, length 0.3-0.4m
Available ill.colours:	white, warm white, amber, red, blue, green
Applications:	signalling device, access control, machine light, wall lamp, etc.