





W. Schmid AG

LED-Technology
the visible difference

Piezoelectric buzzer PB30

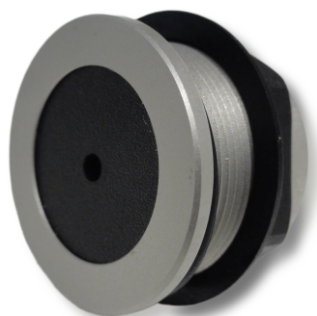

Buzzer PB30

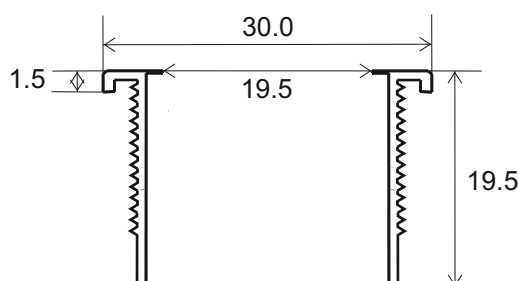

fixing nut M25x1 / AF 27mm
O-Ring 1,6mm

Ø of hole in panel:	25mm
Service voltages:	5/12/24/48 VDC
Sound level:	85 dB
Resonance frequency:	3.5 +/- 0.5 kHz
Operating temperature:	-20 up to +70 °C
Type of sound:	continuous tone, pulse tone upon request
Electronics:	integrated
Housing:	colorless or black anodized aluminum
Terminals:	soldering tags/wires, faston or cable connection
Fixing nut:	plastic or metal hex nut M25x1mm
Scope of applications:	machine industry, railway vehicle construction, mining, access control systems etc.

Manufacturer

W. Schmid AG
Dorfstrasse 23
5442 Fislisbach
Switzerland
Tel: +41 56 470 00 77 Fax: +41 56 470 00 74
E-mail: sales@led-lamps.ch URL: <http://www.led-lamps.ch>