





W. Schmid AG

LED-Technology
the visible difference

LED - Indicator Flasi WSF 910



LED-Indicator WSF910A/WSF910B, 48x48 mm

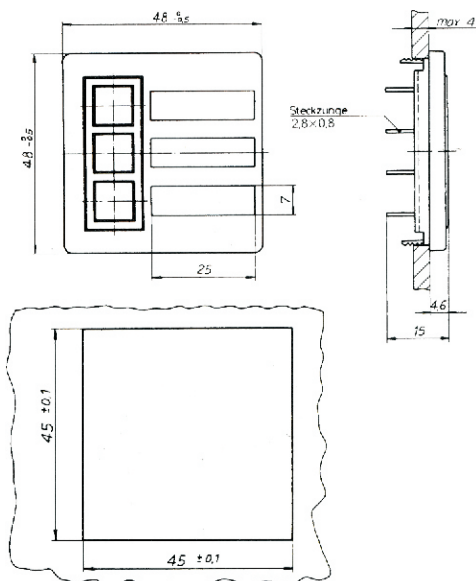

The front surface of these LED-indicators are covered by a plastic foil. Lettering is possible on this foil by screen printing. When placing an order, please consider the sequence of the ill. screens according to this drawing.

- very reliable LED-technology
- long service life (half life >50'000 hours)
- easy snap-in mounting (panel thickness 1...4mm)
- bright and even screen illumination, wide visibility angle
- different colors available
- service voltages: 12/24/36/48/72 and 115 VDC

Technical specifications

Color	Wave length
red	630nm
yellow	590nm
green	520nm
orange	610nm
blue	470nm
white	X = 0.29 / Y = 0.30

Current consumption

10-20 mA per ill. screen

Operating and storage temperature

-40 °C up to +85°C

Ordering example

WSF910A 162137 D24

WSF910A = LED indicator module 48x48mm with 4-6
ill. screens 10x10 mm with common
0V terminal

WSF910B = LED indicator module 48x48 mm with 4-6
ill. screens 10x10 mm with individual
terminals

LED indicator module WSF910A,
48x48mm with common 0V-connector,
with faston-terminals 2,8x0,8 mm, with
6 ill. screens 10x10 mm red/bue/yellow/
red/green/white, 24 V DC,colored ill.
screens. Please consider the sequence
of the ill. screens when placing an order!!

Dimensions

910A/910B = 48x48mm, LED's 10x10mm

Terminals

Faston terminals 2,8 x0,8mm

Color code

1 = red	4 = orange
2 = yellow	6 = blue
3 = green	7 = white

Lens

() standard = colored

W = white (upon request)

Voltages


D = VDC, 12 - 115 V DC

Housing

high impact "Dupont" Delrin frame, black

Lettering

screen printing, white characters on black ground

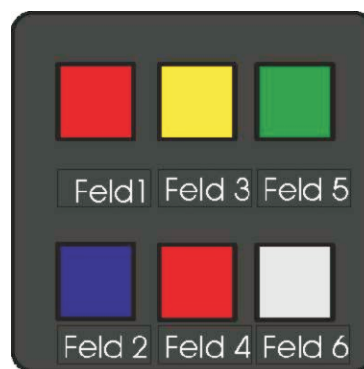

Upon request

- other voltages
- Lettering on the ill. screen(s)

Manufacturer

W. Schmid AG
Dorfstrasse 23
5442 Fislisbach
Schweiz
Tel: +41 56 470 00 77 Fax: +41 56 470 00 74
E-mail: sales@led-lamps.ch URL: <http://www.led-lamps.ch>